

**EN** - For pricing and availability in your local country please visit one of the below links:

**DE** - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

**FR** - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[EC11E0B2LB01](#)

[EC11E183440C](#)

[EC11EH224404](#)

[EC11J1525402](#)

[EC11B15242AE](#)

[EC11E18244A5](#)

[EC11K0920401](#)

[EC11K0924401](#)

[EC11EBB24C03](#)

[EC11B15242AE](#)

**EN**

This Datasheet is presented by  
the manufacturer

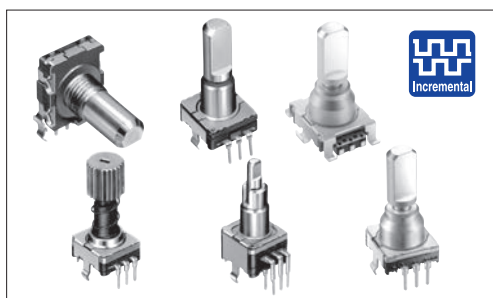
**DE**

Dieses Datenblatt wird vom  
Hersteller bereitgestellt

**FR**

Cette fiche technique est  
présentée par le fabricant

Compact and highly reliable type available in many varieties.



### Typical Specifications

Items	Specifications
Output signal	Two phase of A, B Three phase of A, B and C (EC11EH) Self-return switch (EC111 / EC11E0B)
Rating	10mA 5V DC
Operating life	15,000 cycles 30,000 cycles (EC11EH) 100,000 cycles (EC11K / EC11J)
Operating temperature range	− 40°C to + 85°C

Detector

Slide

Push

Rotary

Encoders

Power

Dual-in-line  
Package Type

TACT Switch™

Metal  
ShaftInsulated  
ShaftHollow  
ShaftRing  
Type

### Product Line

Structure	Shaft onfiguration	Length of the shaft (L <sub>1</sub> ) (mm)	Torque (mN·m)	Number of detent	Number of pulse	Push-on switch	Travel of push-on switch (mm)	Operating life (cycles)	Minimum order unit (pcs.)		Product No.	Drawing No.
									Japan	Export		
Horizontal	Flat	20	12 ± 7	30	15	Without	—	15,000	700	1,400	EC11B15202AA	1
						With	0.5				EC11B15242AE	2
							1.5				EC11B15242AF	3
Vertical			10 ± 7	18	9	Without	—		1,200	2,400	EC11E09204A4	4
				30	15						EC11E15204A3	
			7 $\pm \frac{3}{4}$	Without	EC11E1530401							
			10 ± 7	36	EC11E1820402							
			7 $\pm \frac{3}{4}$	Without	EC11E1830401							
			10 ± 7	18	9						With	
			30	15	EC11E15244G1							
					7 $\pm \frac{3}{4}$	Without	EC11E153440D					
			10 ± 7	36	EC11E18244AU							
			7 $\pm \frac{3}{4}$	Without	EC11E183440C							
			10 ± 7	18	9	1.5	EC11E09244AQ					
				30	15		EC11E15244B2					
			7 $\pm \frac{3}{4}$	Without	EC11E1534408							
			10 ± 7	36	EC11E18244A5							
			7 $\pm \frac{3}{4}$	Without	EC11E1834403							
Less shaft wabble	Serrated	25	12 ± 7	30	15	Without	—	1,000	2,000	EC11G1560414	6	
			8.5 ± 5	Without		With	1.5			EC11G1574402	7	
			12 ± 7	30		EC11G1564411	8					
Vertical	Flat	20	12 ± 5	18	9	Without	—	100,000	1,000	2,000	EC11K0920401	9
				30	15						EC11K1520401	
				18	9	With	0.5				EC11K0924401	10
				30	15						EC11K1524402	
				18	9		1.5				EC11K0925401	
				30	15						EC11K1525401	

### Note

Other varieties are also available. Please inquire.

Refer to P.167 for product specifications.

Refer to P.167 for attached parts.

Refer to P.168 for product varieties.

Refer to P.193 for soldering conditions.

## Product Line

Product Line															
Detector	Structure	Shaft configuration	Length of the shaft (L <sub>1</sub> ,L <sub>2</sub> ) (mm)	Torque (mN·m)	Number of detent	Number of pulse	Push-on switch	Travel of push-on switch (mm)	Operating life (cycles)	Minimum order unit (pcs.)		Product No.	Drawing No.		
										Japan	Export				
Slide	Reflow	Flat	20	12 ± 5	18	9	Without	—	100,000	300	600	EC11J0920404	11		
Push					30	15						EC11J152040F			
Rotary					18	9	With	0.5				12	EC11J0924411		
					30	15							EC11J1524413		
Encoders					18	9		1.5					EC11J0925403		
													EC11J1525402		
Power	Push lock	20-tooth Serrated	25	10 ± 7	30	15	Without	—		800	1,600		EC11E152T409	13	
Dual-in-line Package Type			26.4				With	8					EC11E152U402	14	
TACT Switch™	Self-return switch	Flat	15	3 to 30	Without	Self-return switch	Without	—	15,000			EC1110120005	15		
			20				With	0.5				EC111012010H	16		
								1.5				EC1110120201			
Metal Shaft	ABC switch	Flat	20	10 ± 7	18	ABC switch		With	0.5	30,000	1,200	2,400	EC11EH124403	17	
					30		1.5		EC11EH224403						
					18				EC11EH124404						
									EC11EH224404						
Insulated Shaft	Dual-shaft	Inner-shaft=25	20	10 ± 7	30	15	With	0.5	15,000	700	1,400	EC11EBB24C03	18		
		Slotted						Outer-shaft=15				Without	—	EC11E0B2LB01	19
		Flat						Inner-shaft=25				With	1.5		
Hollow Shaft		Slotted	Outer-shaft=15	3 to 30	Without	Self-return switch	Without	—							
Ring Type	<div>Note</div> Other varieties are also available. Please inquire.														

## Note

Other varieties are also available. Please inquire.


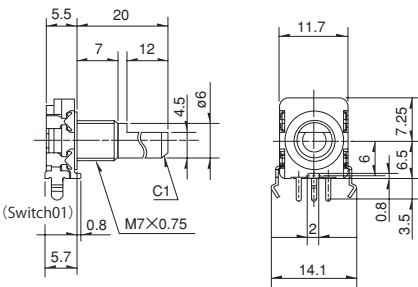
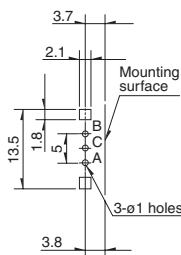

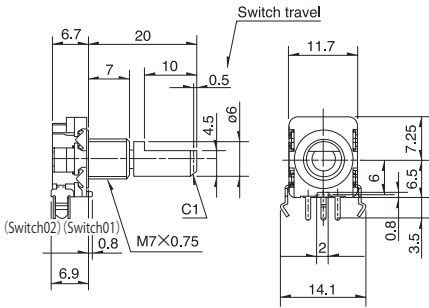


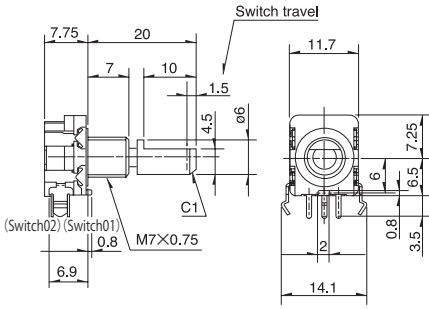


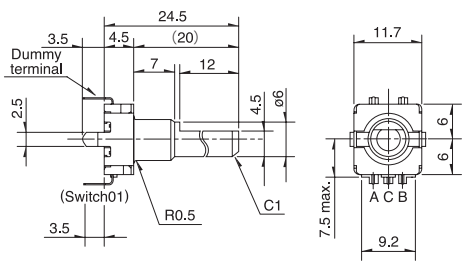


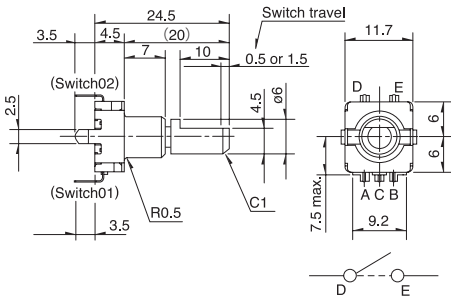

## Packing Specifications

## Tray

Product No.	Number of packages (pcs.)		Export package measurements (mm)
	1 case / Japan	1 case / export packing	
EC11B	700	1,400	370 × 520 × 201
EC11E09 / 15 / 18 / EC11EH	1,200	2,400	540 × 360 × 250
EC11G / EC11K	1,000	2,000	
EC11J	300	600	369 × 283 × 263
EC11E152T / U	800	1,600	363 × 507 × 230
EC111	1,200	2,400	363 × 507 × 216
EC11E0B / BB	700	1,400	

## Dimensions

Unit:mm

No.	Photo	Style	PC board mounting hole dimensions (Viewed from mounting side)
1	<b>EC11B Horizontal</b> 		
2	<b>EC11B Horizontal with push-on switch (travel 0.5mm)</b> 		
3	<b>EC11B Horizontal with push-on switch (travel 1.5mm)</b> 		
4	<b>EC11E Vertical</b> 		
5	<b>EC11E Vertical with push-on switch (travel 0.5 / 1.5mm)</b> 		

Detector

Slide

Push

Rotary

Encoders

Power

Dual-in-line  
Package Type

TACT Switch™

Metal  
Shaft


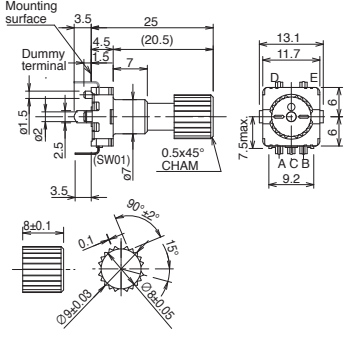


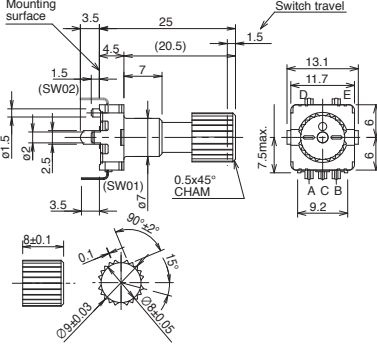


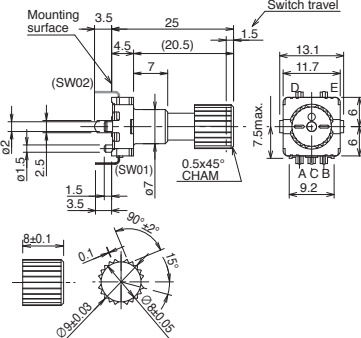


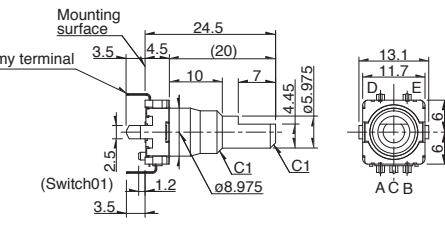
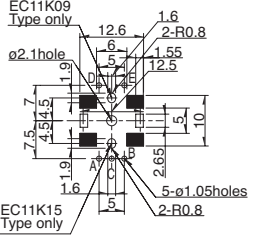

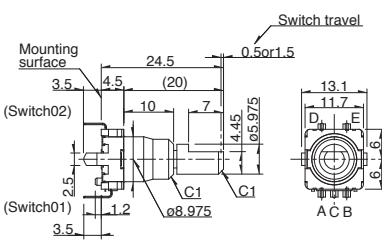
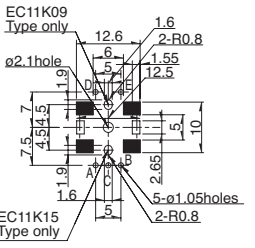
Insulated  
Shaft

Hollow  
Shaft

Ring  
Type


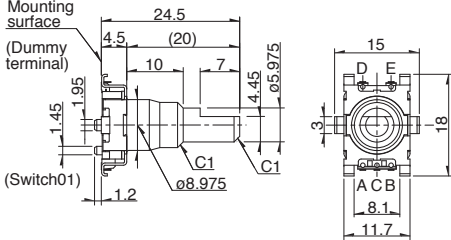
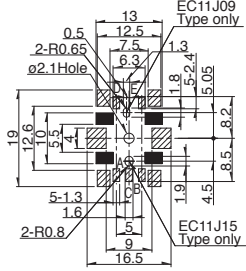

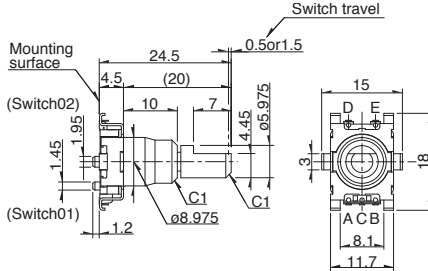
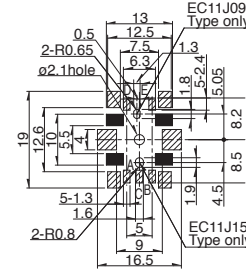

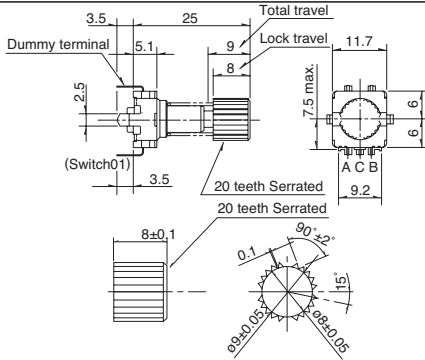


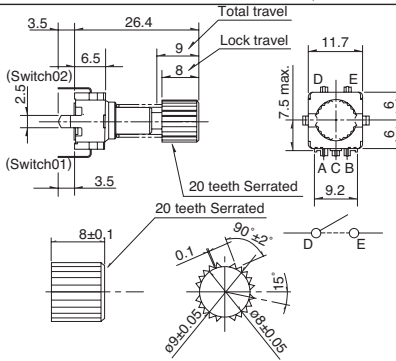


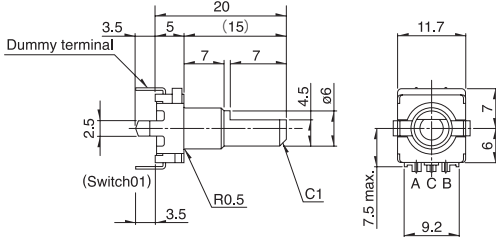

## Dimensions

Unit:mm

Detector	No.	Photo	Style	PC board mounting hole dimensions (Viewed from mounting side)
	6			
	7			
	8			
	9			 EC11K09 Type only EC11K15 Type only Black part : Do not solder and no wiring for electrical contact.
	10			 EC11K09 Type only EC11K15 Type only Black part : Do not solder and no wiring for electrical contact.

## Dimensions

Unit:mm

No.	Photo	Style	PC board mounting hole dimensions (Viewed from mounting side)
11	<b>EC11J Reflow</b> 		 <p>A slant line part: The solder land Black part: Do not solder and wiring for electrical contact</p>
12	<b>EC11J with push-on switch (travel 0.5mm / 1.5mm)</b> 		 <p>A slant line part: The solder land Black part: Do not solder and wiring for electrical contact</p>
13	<b>EC11E152T Push-lock mechanism</b> 		
14	<b>EC11E152U Push-lock mechanism with push-lock switch</b> 		
15	<b>EC111 Self-return switch</b> 		

Detector

Slide

Push

Rotary

Encoders

Power

Dual-in-line  
Package Type

TACT Switch™

Metal  
Shaft


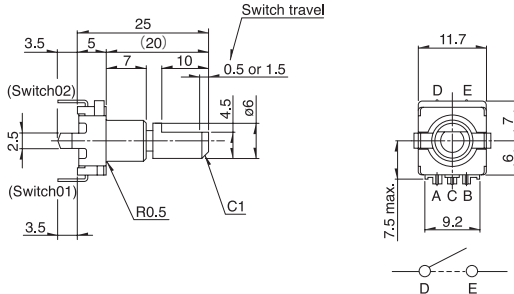


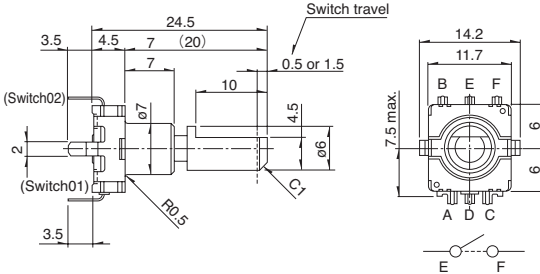


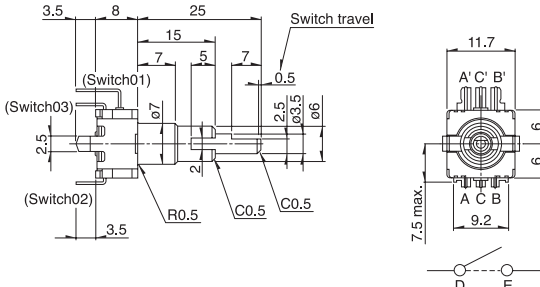


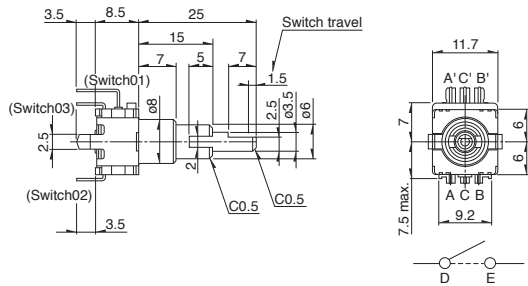

Insulated  
Shaft

Hollow  
Shaft

Ring  
Type

## ■ Dimensions

Unit:mm

No.	Photo	Style	PC board mounting hole dimensions (Viewed from mounting side)
16	<p><b>EC111</b> Self-return switch with push-on switch (travel 0.5mm / 1.5mm)</p> 		
17	<p><b>EC11EH</b> ABC switch with push-on switch (travel 0.5mm / 1.5mm)</p> 		
18	<p><b>EC11E</b> Dual-shaft type with push-on switch (travel 0.5mm) Inner shaft: encoder Outer shaft: encoder</p> 		
19	<p><b>EC11E</b> Dual-shaft type with push-on switch (travel 1.5mm) Inner shaft: encoder Outer shaft: self-return switch</p> 		

# 11mm Size Metal Shaft Encoders / Product Specifications


## Output Wave

EC11B / EC11E / EC11G	EC11E / EC11J / EC11K	EC11EH
<p>EC11B, EC11E, EC11G 30 detents, 15 pulse</p> <p>Detent stability position CW direction</p>	<p>Detent stability position cannot be specified for B signal. EC11E 18 detents 9 pulse EC11E 36 detents 18 pulse EC11J, EC11K</p> <p>Detent stability position CW direction</p>	<p>A signal OFF ON B signal OFF ON C signal OFF ON</p> <p>Detent position CW direction</p>

## Sliding Noise

<p>Measurement condition : Rotation speed 360°/s t : Masking time to avoid chattering</p>	<p><b>Detailed dimensions</b></p> <table> <tr> <td>EC11B</td><td> <math>V_1=V_2=1.5V</math> max. At <math>R = 5k\Omega</math> Chattering : 2ms max. Bounce : 2ms max. </td></tr> <tr> <td>EC11E / EC11G</td><td> <math>V_1=V_2=1.5V</math> max. At <math>R = 5k\Omega</math> Chattering : 3ms max. Bounce : 2ms max. </td></tr> <tr> <td>EC11J / EC11K</td><td> <math>V_1=V_2=2.5V</math> max. At <math>R = 5k\Omega</math> Chattering : 3ms max. Bounce : 2ms max. </td></tr> </table>	EC11B	$V_1=V_2=1.5V$ max. At $R = 5k\Omega$ Chattering : 2ms max. Bounce : 2ms max.	EC11E / EC11G	$V_1=V_2=1.5V$ max. At $R = 5k\Omega$ Chattering : 3ms max. Bounce : 2ms max.	EC11J / EC11K	$V_1=V_2=2.5V$ max. At $R = 5k\Omega$ Chattering : 3ms max. Bounce : 2ms max.
EC11B	$V_1=V_2=1.5V$ max. At $R = 5k\Omega$ Chattering : 2ms max. Bounce : 2ms max.						
EC11E / EC11G	$V_1=V_2=1.5V$ max. At $R = 5k\Omega$ Chattering : 3ms max. Bounce : 2ms max.						
EC11J / EC11K	$V_1=V_2=2.5V$ max. At $R = 5k\Omega$ Chattering : 3ms max. Bounce : 2ms max.						
<p>Test condition : Rotation speed 360°/s</p>	<table> <tr> <td>EC11EH</td><td> At <math>R = 5k\Omega</math> Chattering : 5ms max. Bounce : 5ms max. </td></tr> </table>	EC11EH	At $R = 5k\Omega$ Chattering : 5ms max. Bounce : 5ms max.				
EC11EH	At $R = 5k\Omega$ Chattering : 5ms max. Bounce : 5ms max.						

## Circuit Diagram




# 11mm Size Metal Shaft Encoders / Attached Parts

The following parts are included with the product.

## EC11B Series

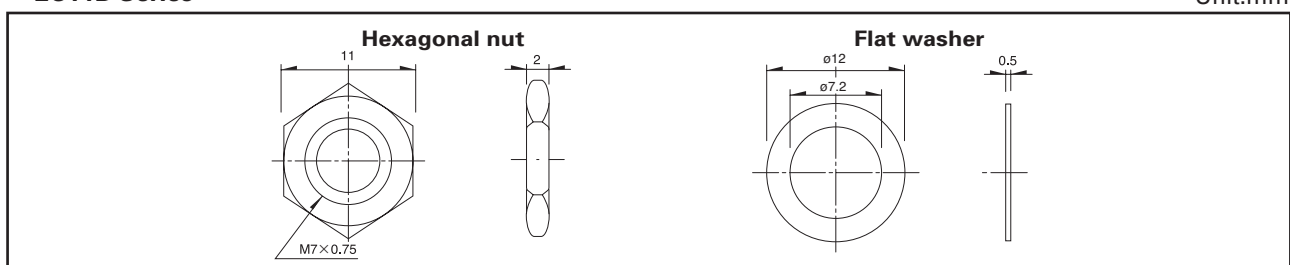Unit:mm





## Shaft Dimensions

### 1. Single-shaft Type (EC11K is excluded. Refer to P.212 for EC11K)


Unit:mm

#### 1) Serrated Type

##### EC11

##### Configuration (Shaft diameter : $\phi 6$ )

Not applicable for EC11E and EC11G with push-lock mechanism




##### ● Detailed dimensions

$L_1$	$L_2$	$\ell_1$	$\ell_2$	$S_1$
20	7	6	1	7
25	10	10	2	11

##### EC11K / EC11J

##### Configuration (Shaft diameter : $\phi 6$ )



##### ● Detailed dimensions


$L_1$	$L_2$	$\ell_1$
15	7	5
20	10	6

#### 2) Flat Type

Unit:mm

##### EC11

##### Configuration (Shaft diameter : $\phi 6$ )



##### ● Detailed dimensions

$L_1$	$L_2$	$\ell$
15	5	7
15	7	5 (6)
20	7	10 (12)
25	10	12


※ 1 Does not comply with EC111

※ 2  $L_2=7$  for EC11B.

Values in parentheses apply to products without push-on switch.

##### EC11K / EC11J

##### Configuration (Shaft diameter : $\phi 5.975$ )



##### ● Detailed dimensions

$L_1$	$L_2$	$\ell$
15	7	5
20	10	7


Dimensions marked with ( ) apply to products without push-on switches.

#### 3) Slotted Type

Unit:mm

##### EC11

##### Configuration (Shaft diameter : $\phi 6$ )




##### ● Detailed dimensions

$L_1$	$L_2$
15	7
20	7
25	10

※  $L_2=7$  for EC11B.

##### EC11K / EC11J

##### Configuration (Shaft diameter : $\phi 5.975$ )



##### ● Detailed dimensions

$L_1$	$L_2$
15	7
20	10

## Notes


- The highlighted figures in shaft types refer to Product Specifications in P.161 and P.162.
- Other varieties are also available. Please inquire.

## 2. Standard Dimensions and configuration of Dual-shaft Type

### 1) Flat Type

Unit:mm

Configuration (Inner-shaft :  $\phi$  3.5 Outer-shaft :  $\phi$  6)



#### ● Detailed dimensions

$L_1$	$L_2$	$L_B$	$l_1$	$l_2$
20	10	5	7	4
25	15	7	7	5
30	20	10	7	5

※  $\phi$  7 for type with inner / outer shaft encoders (EC11EBB)

### Notes

- The highlighted figures in shaft types refer to Product Specifications in P.162
- Other varieties are also available. Please inquire.

Detector

Slide

Push

Rotary

Encoders

Power

Dual-in-line  
Package Type

TACT Switch™
















Metal  
Shaft

Insulated  
Shaft

Hollow  
Shaft

Ring  
Type

## List of Varieties

Type		Metal shaft													
		9mm size		11mm size											
Series		EC09E		EC11B		EC11E				EC11G					
Photo															
Output		Incremental (Two phase A and B )													
Shaft types		Single-shaft								Dual-shaft		Single-shaft			
Operating direction		Vertical		Horizontal		Vertical									
Number of pulse / Number of detent		15 / 30				9 / 18 15 / 30 or Without 18 / 36 or Without						15 / 30 or Without			
Features		—		—		Without detent Push-lock mechanism				—		Less shaft wobble			
Dimensions (mm)	W	9.5		11.7											
	D			13.8		12									
	H	4.5		5.5		4.5				8 / 8.5		4.5			
Operating temperature range		-40℃ to + 85℃													
Operating life		15,000 cycle													
Automotive use															
Life cycle (availability)															
Electrical performance	Rating	10mA 5V DC													
	Max./min. operating current (Resistive load)	10mA / 1mA													
	Insulation resistance	100M Ω min. 250V DC													
	Voltage proof	300V AC for 1 minute or 360V AC for 1s		300V AC for 1 minute or 360V AC for 2s											
Mechanical performance	Rotational torque (Without detent)	—		—		7 ± <sup>3</sup> / <sub>4</sub> mN·m				—		8.5 ± 5 mN·m			
	Detent torque	8 ± 5mN·m		12 ± 7mN·m		10 ± 7mN·m						12 ± 7 mN·m			
	Push-pull strength	100N													
Shaft configuration		Flat		Flat, Slotted, Serrated						Inner-shaft: Flat Outer-shaft: Slotted		Serrated			
Terminal type		Insertion													
Switch Specifications	Switch type	Push-on switch								Push-lock mechanism switch※		Push-on switch			
	Contact arrangement	Single pole and single throw (Push-on)													
	Travel (mm)	0.5 ± 0.3	1.5 ± 0.5	0.5 ± <sup>0.4</sup> / <sub>0.3</sub>	1.5 ± 0.5	0.5 ± 0.3	1.5 ± 0.5	8 ± 0.8	0.5 ± 0.3	1.5 ± 0.5	1.5 ± 0.35				
	Operating force (N)	6 ± <sup>2.5</sup> / <sub>2</sub>	4 ± 2	6 ± 3	5 ± 2	6 ± <sup>2.5</sup> / <sub>2</sub>	4 ± 2	8 max.	6 ± <sup>2.5</sup> / <sub>2</sub>	4 ± 2	5 ± 2				
	Rating	10mA 5V DC		0.1A 5V DC (500 μA 5V DC min. ratings)											
	Contact resistance	100m Ω max. for initial period; 200m Ω max. after operating life.													
	Operating life	10,000 times min.		25,000 times min.	20,000 times min.				10,000 times min.	20,000 times min.					
Page		160		161											

- Encoders Soldering Conditions . . . . . 193
- Encoders Cautions . . . . . 194

### Notes

- ※ marked specification is only applicable to EC11E152U402.
- indicates applicability to all products in the series.

Detector

Slide

Push

Rotary

Encoders

Power

Dual-in-line  
Package Type

TACT Switch™

Metal  
Shaft


















Insulated  
Shaft

Hollow  
Shaft

Ring  
Type

# Encoders

## List of Varieties

Type		Metal shaft											
		11mm size							20mm size				
Series		EC111		EC11EH		EC11K		EC11J		EC20A / RK203		EM20B	
Photo													
Output		Self-return switch		Incremental (Three phase A, B and C)		Incremental (Two phase A and B )							
Shaft types		Single-shaft											
Operating direction		Vertical											
Number of pulse / Number of detent		—		6×ABC / 18 10×ABC / 30		9 / 18 15 / 30			18 / 18		40 / 40		
Features		—		—		—		Surface Mount Type		—		Magnetic type; LED indicator option	
Dimensions (mm)	W	11.7							20.2		20		
	D	13		12			14.2		19.2		22.25		
	H	5		4.5					10		13		
Operating temperature range		−40℃ to + 85℃							−30℃ to + 80℃		−10℃ to + 70℃		
Operating life		15,000 cycles		30,000 cycles		100,000 cycles			30,000 cycles		500,000 rotations		
Automotive use												—	
Life cycle (availability)													
Electrical performance	Rating	10mA 5V DC							1mA 5V DC		10mA 5V±5% DC		
	Max./min. operating current (Resistive load)	10mA / 1mA							—		15mA / —		
	Insulation resistance	100M Ω min. 250V DC							10MΩ min. 50V DC		100MΩ min. 250V DC		
	Voltage proof	300V AC for 1 minute or 360V AC for 2s				300V AC for 1 minute or 360V AC for 1s			50V AC for 1 minute or 60V AC for 2s		300V AC for 1 minute or 360V AC for 2s		
Mechanical performance	Rotational torque (Without detent)	3 to 30mN·m		—							7mN·m max.		
	Detent torque	—		10±7mN·m		12 ± 5mN·m			40±20mN·m		8±5mN·m		
	Push-pull strength	100N											
Shaft configuration		Flat, Slotted, Serrated							Flat				
Terminal type		Insertion					Reflow		Insertion				
Switch Specifications	Switch type	Push-on switch											
	Contact arrangement	Single pole and single throw (Push-on)											
	Travel (mm)	0.5±0.3	1.5±0.5	0.5±0.3	1.5±0.5	0.5±0.3	1.5±0.5	0.5±0.3	1.5±0.5		0.5 <sup>+0.4</sup> <sub>−0.3</sub>		
	Operating force (N)	6 <sup>+2.5</sup> <sub>−2</sub>	4±2	6 <sup>+2.5</sup> <sub>−2</sub>	4±2	5±2	4±2	5±2	4±2		6±3		
	Rating	0.1A 5V DC (500 μA 5V DC min. ratings)				0.1A 5V DC (0.1mA 5V DC min. ratings)			0.5A 16V DC (1mA 16V DC min. ratings)		0.1A 5V DC		
	Contact resistance	100m Ω max. for initial period; 200m Ω max. after operating life.											
	Operating life	20,000 times min.				1,000,000 times min.	100,000 times min.	1,000,000 times min.	100,000 times min.	20,000 times min.		25,000 times min.	
Page		161							170		172		

● Encoders Soldering Conditions . . . . . 193

● Encoders Cautions . . . . . 194

**Note** ● indicates applicability to all products in the series.

## Reference for Hand Soldering

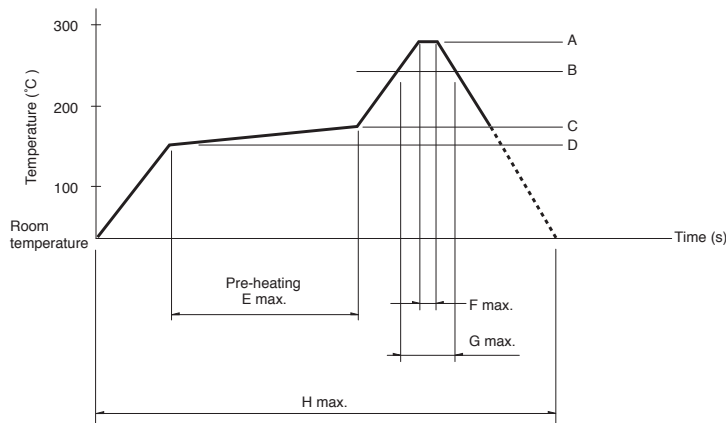
Series	Tip temperature	Soldering time	No. of solders
EC05E, EC09E, EC10E, EC111, EC11B, EC11E, EC11G, EC11K, EC12D, EC12E, EC18A, EC20A, EC21A, EC28A, EC35A, EC35AH, EC35B, EC40A, EC45A, EC50A, EC60A, EM20B	350°C max.	3s max.	1 time
EC11J	350±10°C	3 <sup>+1</sup> <sub>0</sub> s	2 time

## Reference for Dip Soldering

Series	Preheating		Dip soldering		No. of solders
	Soldering surface temperature	Heating time	Soldering temperature	Soldering time	
EC09E, EC11B, EC111, EC11E, EC11G, EC11K, EC18A, EC20A, EC21A, EC28A, EC35A, EC35AH, EC35B, EC50A	100°C max.	2 min. max.	260±5°C	5±1s	2 time max.
EC10E, EC12D, EC12E	100°C max.	1 min. max.	260±5°C	3±1s	2 time max.
EC40A	110°C max.	1 min. max.	260°C max.	10s max.	1 time
EC45A, EC60A	100°C max.	2 min. max.	260°C max.	5s max.	2 time max.
EM20B	80°C max.	1 min. max.	260°C max.	3s max.	2 time max.

## Condition for Reflow

### Temperature profile



Series	A	B	C	D	E	F	G	H	No. of reflows
EC11J	260°C	230°C	180°C	150°C	2 min.max.	3s	40s	4 min. max	2 time max.
EC05E	250°C min.	230°C min.	180°C	150°C	60s to 120s	—	30s to 40s	—	2 time max.

## Notes

- When using an infrared reflow oven, solder may sometimes not be applied. Be sure to use a hot air reflow oven or a type that uses infrared rays in combination with hot air.
- The temperatures given above are the maximum temperatures at the terminals of the potentiometer when employing a hot air reflow method. The temperature of the PC board and the surface temperature of the potentiometer may vary greatly depending on the PC board material, its size and thickness. Ensure that the surface temperature of the potentiometer does not rise to 250°C or greater.
- Conditions vary to some extent depending on the type of reflow bath used. Be sure to give due consideration to this prior to use.

[EC11E153440D](#)

[EC11E1830401](#)

[EC11E1530401](#)

[EC11J0920402](#)

[EC11E0B2LB01](#)

**EN** - For pricing and availability in your local country please visit one of the below links:

**DE** - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

**FR** - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[EC11E0B2LB01](#)

[EC11E183440C](#)

[EC11EH224404](#)

[EC11J1525402](#)

[EC11B15242AE](#)

[EC11E18244A5](#)

[EC11K0920401](#)

[EC11K0924401](#)

[EC11EBB24C03](#)

[EC11B15242AE](#)

**EN**

This Datasheet is presented by  
the manufacturer

**DE**

Dieses Datenblatt wird vom  
Hersteller bereitgestellt

**FR**

Cette fiche technique est  
présentée par le fabricant